


ROLLENKETTING Rechte Zijplaat

Europese norm

DIN 8187

ISO/R 606

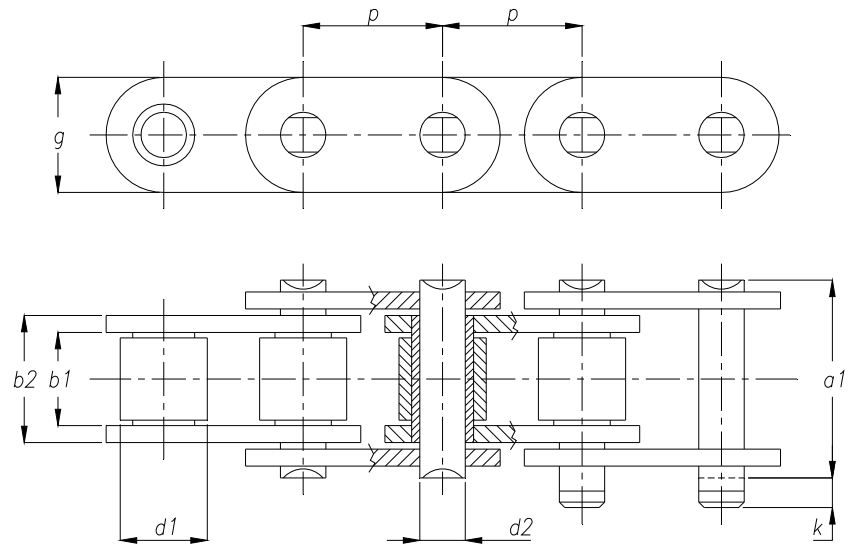

K.T.N. nummer	Steek		Inwendige breedte b1 min. [mm]	Rol-diameter d1 max. [mm]	b2 max. [mm]	Pen-diameter d2 h9 [mm]	a1 max. [mm]	k max. [mm]	g max. [mm]	Schar-nierend opp. [cm ²]	Breuk-belasting min. [kN]	Gewicht ca. [kg/m]
	[inch]	[mm]										
06B-1	3/8	9,525	5,72	6,35	8,53	3,28	13,5	3,3	8,2	0,28	9,0	0,41
08B-1	1/2	12,7	7,75	8,51	11,30	4,45	17,0	3,9	11,8	0,50	20,0	0,78
10B-1	5/8	15,875	9,65	10,16	13,28	5,08	19,6	4,1	14,7	0,67	27,0	1,03
12B-1	3/4	19,05	11,68	12,07	15,62	5,72	22,7	4,6	16,1	0,89	30,0	1,30
16B-1	1	25,4	17,02	15,88	25,45	8,28	36,1	5,4	21,0	2,10	76,0	3,30
16B-1	1	25,4	17,02	15,88	25,45	8,28	36,1	5,4	24,0	2,10	76,0	3,40
20B-1	1 1/4	31,75	19,56	19,05	29,01	10,19	43,2	6,1	26,4	2,96	110,0	4,50
24B-1	1 1/2	38,1	25,40	25,40	37,92	14,63	53,4	6,6	33,4	5,54	180,0	7,40

Tevens leverbaar in staal verzinkte uitvoering en in Duplex - Triplex uitvoering.